


Met Panel



Model: MP-G3-592x592x48
MP: Met Panel
G3: Filter Class EN779-2012
592x592x48: Size WxLxD mm

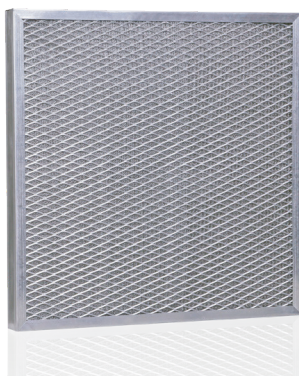

APPLICATIONS

- Washeable for repeated use
- Low pressure drop
- High temperature
- Corrosive environments
- Large bulky contaminants
- Oil mist or grease separation

METAL FILTER FOR OIL AND GREASE SEPARATION

Frame: Galvanized

Media: Galvanized Mesh Wire

Modelling: Straight

Face Guard: Both Side with Grid

Max. Temperature: 200°C

Relative Humidity: 100%

Flame Resistance: F1 DIN 53438

Filter Stage: I

Rec. Final Pres. Drop Acc.

- EN 779-2012: 250 Pa.
- ISO 16890: 200 Pa.

Model	MGT's Reference	Size WxLxD	Filter Class ISO 16890	Filter Class EN 779-2012	Area m ²	Air Flow m ³ /h	Pressure Drop Pa	Weight Kg
MP-G2-287x287x25	PM2GOGL2	287x287x25	ISO COARSE 20%	G2	0.08	850	30	1.5
MP-G2-287x592x25	PM2GOGL2	287x592x25	ISO COARSE 20%	G2	0.17	1700	30	2.8
MP-G2-490x592x25	PM2GOGL2	490x592x25	ISO COARSE 20%	G2	0.29	2800	30	5.2
MP-G2-592x592x25	PM2GOGL2	592x592x25	ISO COARSE 20%	G2	0.35	3400	30	5.5
MP-G3-287x287x48	PM3GOGL2	287x287x48	ISO COARSE 40%	G3	0.08	850	40	2
MP-G3-287x592x48	PM3GOGL2	287x592x48	ISO COARSE 40%	G3	0.17	1700	40	4
MP-G3-490x592x48	PM3GOGL2	490x592x48	ISO COARSE 40%	G3	0.29	2800	40	7.25
MP-G3-592x592x48	PM3GOGL2	592x592x48	ISO COARSE 40%	G3	0.35	3400	40	8

Other options:

Frame: Aluminum / SS304 / SS316.

Media: Stainless Mesh Wire, Aluminum Bounded

Face Guard: Without Grid, Face Grid Air Outlet

MADE IN TURKEY

Manufacturer: MGT